RR2

INFLATABLE RESCUE SLED

The perfect water rescue craft for use in rivers; flooded urban/coastal areas, mountains and lakes. The RR2 Rescue Sled is lightweight and portable, both inflated and deflated. It is easy to manoeuvre and can be paddled, pulled by hand or towed by a jet ski, boat or small hovercraft.

The RR2 Rescue Sled was developed as a casualty transfer system for use in shallows and mud. The unit handles extremely well in accessing areas that rescue boats cannot reach, providing a stable working platform for marine rescue. the unit is easily towed, paddled or line transferred and packs down to a small, easy to handle size making a versatile and effective system.

Further developments of the RR2 Rescue Sled led to trials in conjunction with Swift Water Rescue techniques. The Swift Water system allows the sled to quickly access rescue situations in fast flows of water.

The sled has been used operationally with jet skis and fast rescue craft for the recovery of casualties. When clipped to the side of a fast rescue craft or pontoon, the sled will act as a platform enabling easy recovery of secured casualties, swimmers or divers. A variety of stretchers can be located on top of the sled and used with a four-point lifting harness.

Two sleds can be joined together with a twining rig providing a very stable platform with casualty access between the hulls. Twinned sleds operated with two rescue personnel make high-risk rescue situations a safer option. The innovative properties of the unit's design allows it to be applied to other hazardous environments including ice, snow or wetlands.

Whats Supplied With The Inflatable?

- 1x Twin Blade Paddle
- 2x Inflation Valve Fittings
- 1x HP2 Inflation Hand Pump
- 1x Storage Bag
- 1x Repair Kit & Tools

DESCRIPTION

INFLATABLE EQUIPMENT

STOCK CODE

RESCUE SLED-RR2


NORTHERN DIVER

+44 (0) 1257 25 44 44 | INFO@NDIVER.COM

VISIT WWW.NDIVER-RESCUE.COM





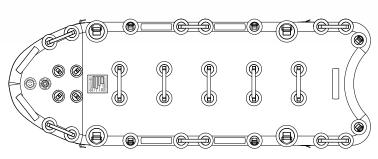

Spec Details	RR2 Rescue Raft
Overall length	300cm
Overall width	100cm
Internal width	n/a
Sponson/pontoon dia.	n/a
Floor materials	DWF
Floor thickness	15cm
Gross weight	23.7kg
Carton/packing dims.	110*60*28cm
Chambers	1
Max inlet fill	0.7bar/10psi
SS316 stainless steel D-rings	4S+10M+5L
Handles	6+5
Max loading	450kg
Max persons	2+1

Inflatable only weight: 18kg









