RESCUE BOATS INFLATABLE WITH ALUMINIUM FLOOR

Inflatable boats manufactured with aluminium floor panels are quick amd easy to assemble, giving a stable floor to stand on.

Why purchase an inflatable boat?

- Safe and effective in Rescue ops
- Rapid-deployment for rescuers
- Easy to recover a man overboard
- Highly maneuverable
- Efficient in shallow waters
- Fast inflation system
 Large buoyancy tubes
- Safe and stable
- Heavy duty and lightweight
- Easy to fold and to carry
- Transportable by a two men crew
- Easy maintenance
- Fully equipped to deploy in the field

Northern Divers inflatable boats are available in DS300, DS400 as standard. DS500, DS600 and models in between may also be available upon request. If you do not see the specification of boat you require please contact us. We can create an inflatable to your exact requirements no matter how big or small the request.

Standard boat options are as follows:

- Choose your model size
- PVC or hypalon fabric construction (models may vary)
- Fold away aluminium panels
- Choose your colour
- Brand with your team crest /logo

Extra boat options as are follows:

- Reinforced transom
- Rubber reinforcements
- Storage pockets
- Additional d-rings
- Suzuki outboard motor
- SBS bunk style trailer *Extra options must be requested

What's Supplied With The Inflatable?

- 1 (or) 2 Inflation Valve Fittings
- 1x HP2 Inflation Hand Pump
- 1x Storage Bag
- 1x Repair Kit & Tools

DESCRIPTION

INFLATABLE EQUIPMENT

STOCK CODE

BOAT-INFLATABLE SIZE-COLOUR

NORTHERN DIVER +44 (0) 1257 25 44 44 | INFO@NDIVER.COM VISIT WWW.NDIVER-RESCUE.COM



Aluminium floor






Choose from 5 colour options. Custom branding also available.

Inflatable boats are also available in both PVC and HYPALON fabrics. Please contact us to discuss your specific requirements.

DS300 - WITH ALUMINIUM FLOOR TECHNICAL DRAWINGS

Spec Details

Overall length - 320cm Overall width - 152cm Internal width - 70cm Sponson/pontoon dia. - 42cm Floor materials - DWF Floor thickness - 8cm Aluminium folding floor panels: 4 Inflatable only weight: 36kg Gross weight - 41.5kg Carton/packing dims. - 110*62*40cm Chambers - 3+1 Max inlet fill (sponsons) - 0.35bar/5psi Max inlet fill (floor) - 0.7bar/10psi SS316 S/S D-rings - coming soon Handles - 4+2 Benches - 1 Max loading - coming soon Max persons - 4+1 Engine size - 15HP Custom branding available - yes Colours - 5 available Fabric options: PVC and Hypalon

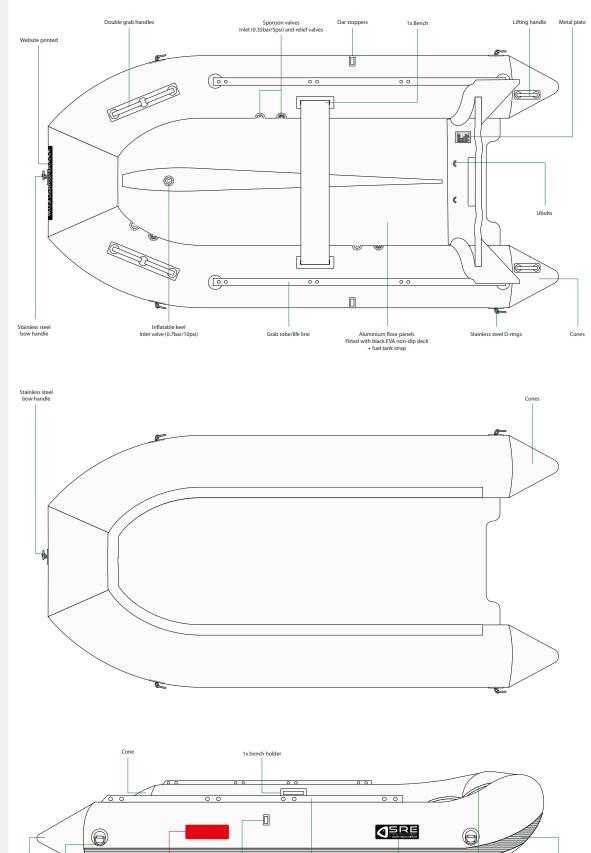

Customer logo - 300 x 100mm Printed direct to inflatable or on Velcro panel Oar stopp

Printed SRE logo 300mm x 100mm Double grab handle


Rubber bumper strij

DS400 - WITH ALUMINIUM FLOOR TECHNICAL DRAWINGS

Double grab handles

Spec Details

Overall length - 400cm Overall width - 190cm Internal width - 94cm Sponson/pontoon dia. - 48cm Floor materials - DWF Floor thickness - 8cm Aluminium folding floor panels: 4 Inflatable only weight: 110kg Gross weight - 115kg Carton/packing dims. - 140*70*50cm Chambers - 4+1 Max inlet fill (sponsons) - 0.35bar/5psi Max inlet fill (floor) - 0.7bar/10psi SS316 S/S D-rings - coming soon Handles - 4+2 Benches - 2 Max loading - coming soon Max persons - 8+1 Engine size - 25HP Custom branding available - yes Colours - 5 available Fabric options: PVC and Hypalon

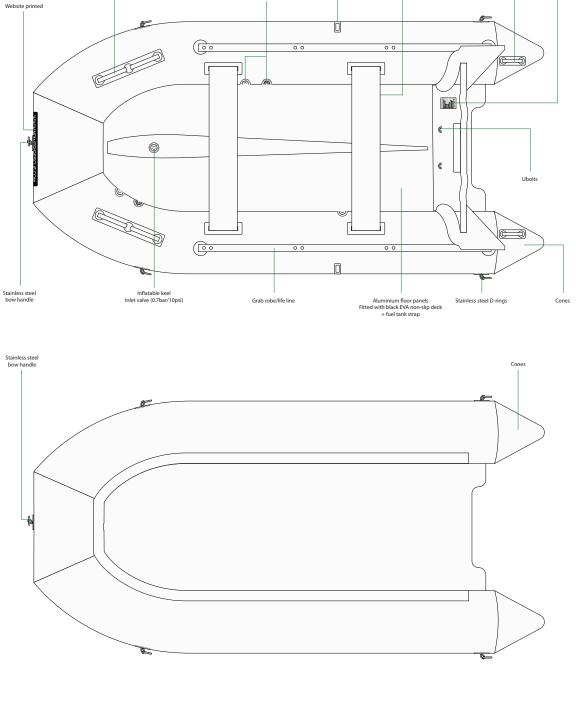

Sponson valves Inlet (0.35bar/5psi) and relief val Oar stoppers

2x Benches

Lifting handle

